


Sun Dock LT320 -Hydraulic Dock Leveler-

60KN dynamic loading conventional hinged hydraulic dock leveler.

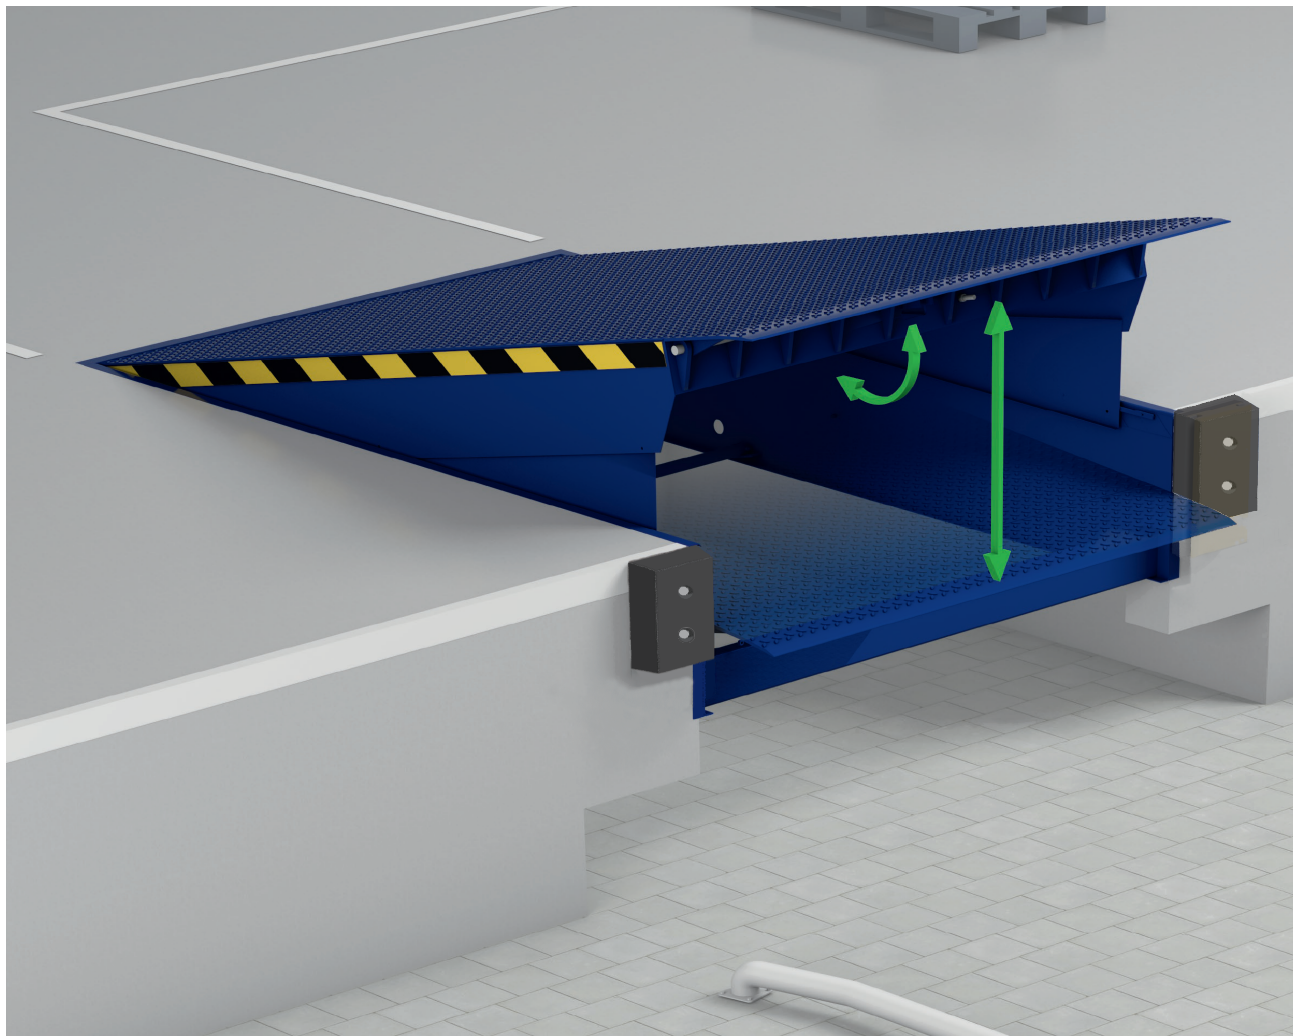

Features

- **Systems** : High quality Euro low pressure hydraulic system with the dual stroke cylinders for the main deck and the hinged lip cylinder with systematic control unit
- **Finish** : Steel parts with RAL5010 (gentian blue) painted
- **Safety** : Hydraulic emergency stop and stopping all movements in case of power failure / side yellow -black warning markers / Maintenance strut
- **Bumpers** : Rubber bumpers are installed at both side of dock leveler
- **Operation** : Push button
- **Option** : Floor side gap rubber seals

Power source

Power source	Power [kw]
Three phases 400V 50Hz/16A	0.75

Size

Leveler width [mm]		Leveler Length [mm]	Lip size [mm]	Leveler Height [mm]	Operating Range [mm]	
					Above Dock	Below Dock
Standard	2000	2500	400	600	380	330
		2000	400	600	360	270
	Basic 2000 2100 2250	2500	400	600	380	330
		2750	400	600	390	360
		3000	400	600	400	390

Classic plus control



Notice

- In case of fork lift trucks with very small wheels are used, nominal load capacity is 40kN in order to follow EN 1398 as maximum permissible incline 12.5%.
- Pit frame work and floor embeded conduit work are required by customer.