


Sun Dock LT350 -Hydraulic Dock Leveler-

100KN dynamic loading conventional hinged hydraulic dock leveler.

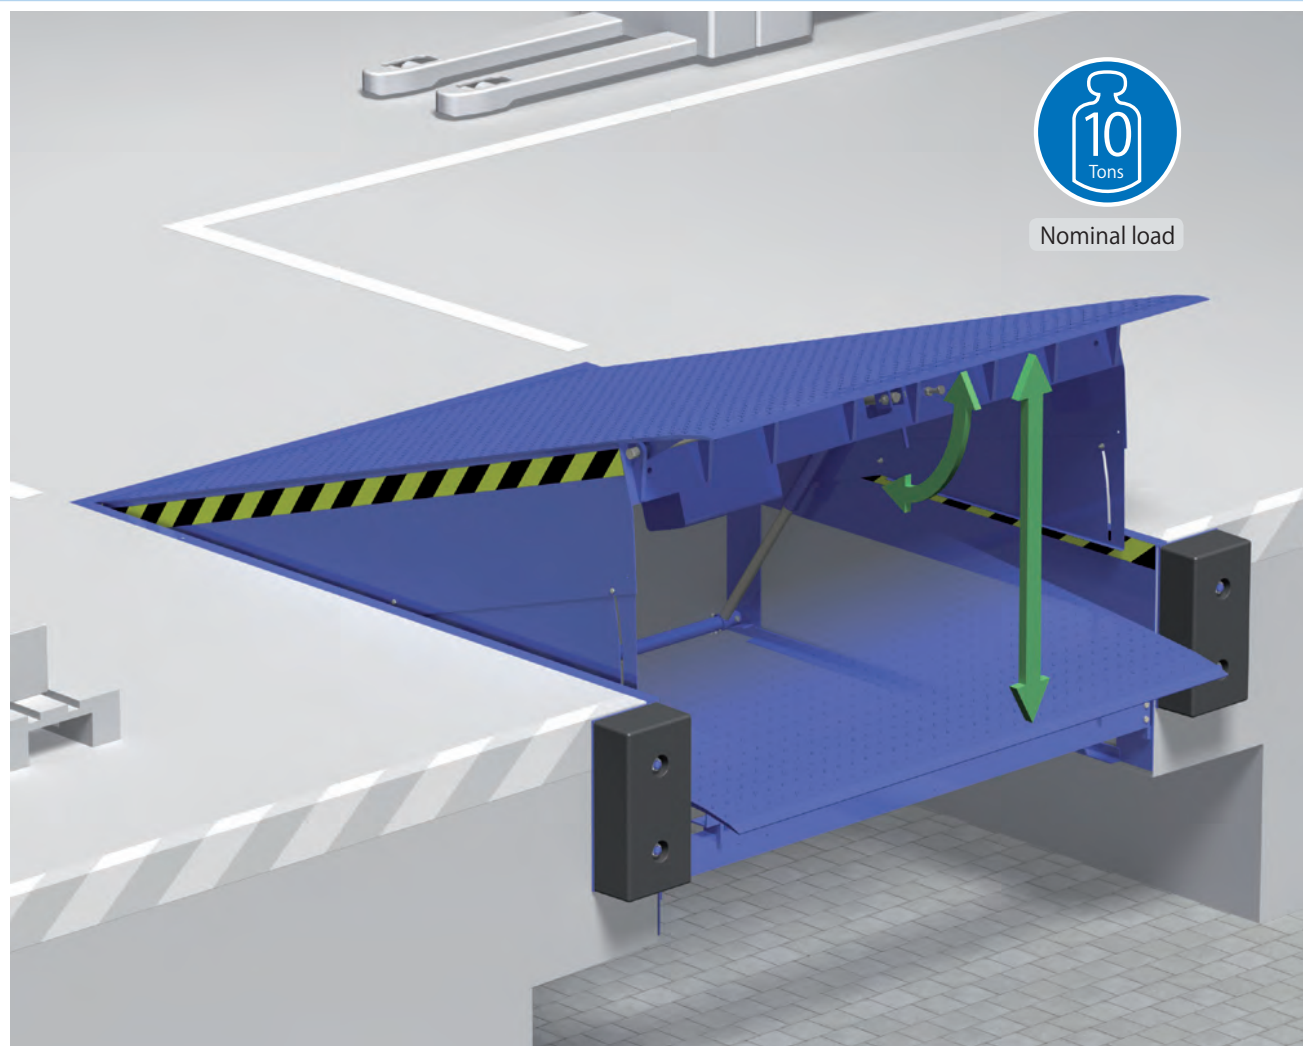

Features

- **Systems** : High quality Euro hydraulic system with deck cylinders and hinged lip cylinder with systematic control unit
- **Finish** : Steel parts with RAL5010 (gentian blue) painted
- **Safety** : Hydraulic emergency stop and stopping all movements in case of power failure / side yellow -black warning markers / Maintenance strut
- **Bumpers** : Rubber bumpers are installed at both side of dock leveler
- **Operation** : Push button
- **Option** : Floor side gap rubber seals

Power source

Power source	Power [kw]
Three phases 400V 50Hz/16A	1.5

Size

Leveler width [mm]	Leveler Length [mm]	Lip size [mm]	Leveler Height [mm]	Operating Range [mm]	
				Above Dock	Below Dock
1750 2000 2250	2000	400	600	250	270
	2000	400	700	290	340
	2500	400	600	310	240
	2500	400	700	360	330
	3000	400	600	360	230
	3000	400	700	430	320
	3500	400	800	520	320
	4000	400	900	550	330
	4500	400	900	600	340

i-Vision HA



Notice

- Maximum permissible incline 12.5% as EN 1398.
- Pit frame work and floor embeded conduit work are required by customer.