

Quick Saver

NEW Quick Saver S3-N

For narrow openings up to 3m width (only for interior use)



Compact




Smart



Emergency egress



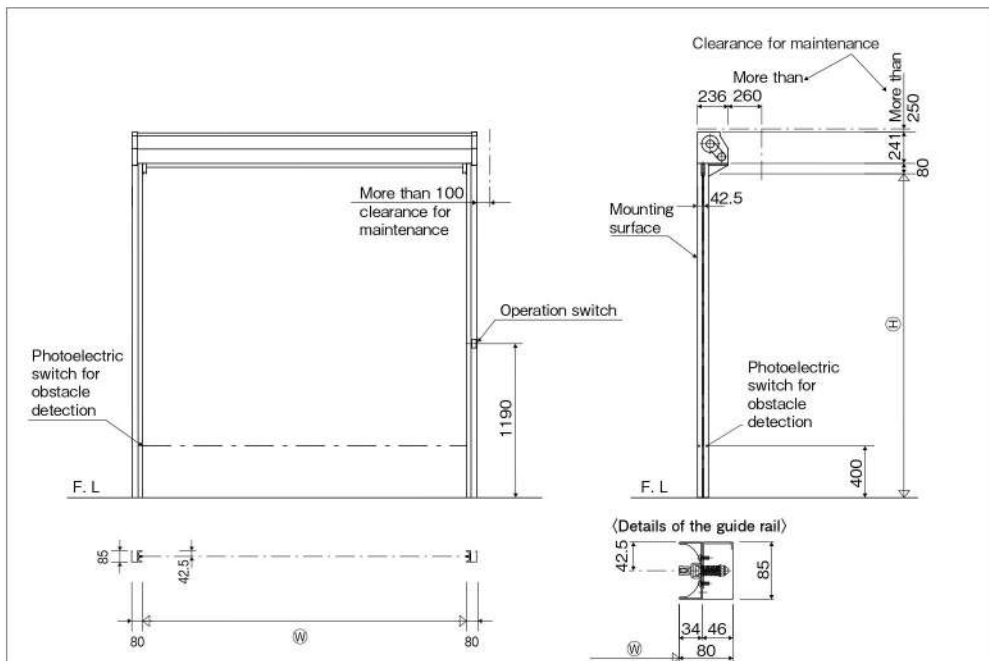

Specification

- **Operation** Powered (with open/close switch, slow start and slow stop)
Power source: Single phase 220VAC
Operator: Brushless DC motor 0.4 kW
- **Operable frequency** Up to 60 times / hour
- **Design operation cycles** 7 years / 500 thousand cycles (3 years / 200 thousand cycles for consumable parts) However, 100 thousand cycles for non-inflammable sheet. Except for some electric components. (Apply either the number of years or the number of cycles, whichever comes first.) ● The figures above are not guaranteed values.
- **Guide rail material** Steel
- **Service conditions** Interior only
Ambient temperature: -10°C to $+40^{\circ}\text{C}$
Ambient relative humidity: RH 85% or below
Environmental conditions: except for coastal districts, chemical plants, other corrosive environments, and areas where condensation or freezing occurs
- **Consumables** Sheet (sheet, hanger, weight), guide rail, repairing guide
- **Operation speed** Opening speed 2.0m/sec
Closing speed 0.8m/sec ($H > 2.8\text{m}$), 0.5m/sec ($H \leq 2.8$)

Caution: When you don't use this products, be sure to leave the sheet fully open.
The sheet might come off because of a gust.

- Specifications are subject to change without notice for the purpose of quality increase.
- Colors shown here may differ from the actual sheets.


High wind resistance

Wind resistance (when fully closed): the wind load which the sheet can withstand in fully closed position.

Operable wind load limit: the maximum wind load under which the Quick Saver can operate.

● Even under low wind load or small wind pressure difference between interior and exterior, the sheet deflects. When Quick Saver is interlocked with a conveyor, it should be designed and installed properly to prevent contact with the device.

※ The following graph is calculated value and is not a guarantee value.

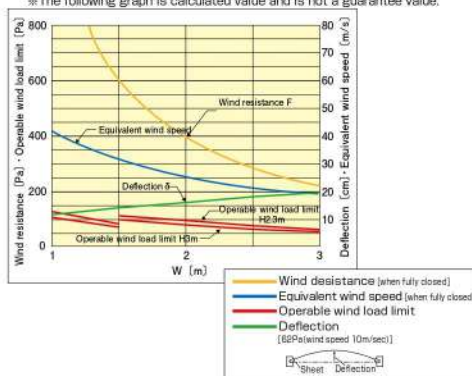

SUN METAL CO., LTD.

180-184 Metro Building, 4th Floor
Rajawongse Road, Bangkok 10100 THAILAND

Tel : 0-2222-5190 , 0-2223-2176 # 122 Fax : 0-2226-2163 , 0-2226-5099